



On-Premises Barrier Washer-Extractors

SH180, SH240, SH280

FEATURES

- Freestanding, high spin
- Complete stainless steel cabinet
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- Easy access to all important parts from all sides
- Large door opening for easy loading & unloading
- Automatic door positioning
- Liquid soap connection
- USB plug (on the side panel)

OPTIONS

- Patented inner door lock mechanism
- Liquid soap pumps
- Water recovery option incl. second drain valve
- Steam heating version
- Water sample tap
- Second Display (located on the clean side)
- Weighing system

- FPS (Fluctuating Power Supply) Protection
- End of cycle extra signaling (traffic light + siren)
- Lateral drain

Quantum Touch controls

- 7" Touch intuitive programmer
- Available in 34 languages
- Factory built wifi for programming and updating
- Service alerts for easy maintenance
- Fully programmable
- 20 preset programs, up to 99 in memory
- Combine with LMS laundry management software and SQ Insights for a perfect control of your laundry installation.



Approach, program and running cycle screen



Easy Operation



Hygienic Solution



Large Door Opening


On-Premises Barrier Washer-Extractors

Specifications

	SH180	SH240	SH280
CAPACITY			
Drum volume [l]	180	240	280
Capacity 1:10 [kg/lb]	18/40	24/53	28/62
Capacity 1:9 [kg/lb]	20/44	27/60	31/68
Drum diameter [ø]	750	750	750
Number of drums	1	1	1
Number of loading doors	1	1	1
Number of unloading doors	1	1	1
DRUM SPEED			
Washing speed [rpm]	42	42	42
Highest spin speed [rpm]	939	939	914
G-Factor	370	370	350
PROGRAMMER	Quantum Touch Control	Quantum Touch Control	Quantum Touch Control
CABINET	Stainless steel	Stainless steel	Stainless steel
HEATING			
Electricity [kW]	12/18	18	21,9
Steam [bar]	3-8	3-8	3-8
CONNECTION	2 × 103	2 × 103	2 × 103
Electrical	1x 200-240V 50/60Hz 3x 200-240V 50/60Hz 3x 380-415V +N 50/60Hz 3x 380-415V 50/60Hz 3x 440-480V 50/60Hz 3x DN20 3/4" 1x DN15 1/2"		
Water inlet			
Steam inlet			
DIMENSIONS			
H×W×D [mm]	1455×900×1145	1455×1020×1145	1455x1130x1145
Net weight [kg]	430	460	490
TRANSPORT DATA			
Packed H×W×D [mm]	1610×1010×1235	1610×1130×1235	1610x1240x1235
Gross weight [kg]	485	515	550

On-Premises Barrier Washer-Extractors

Dimensions

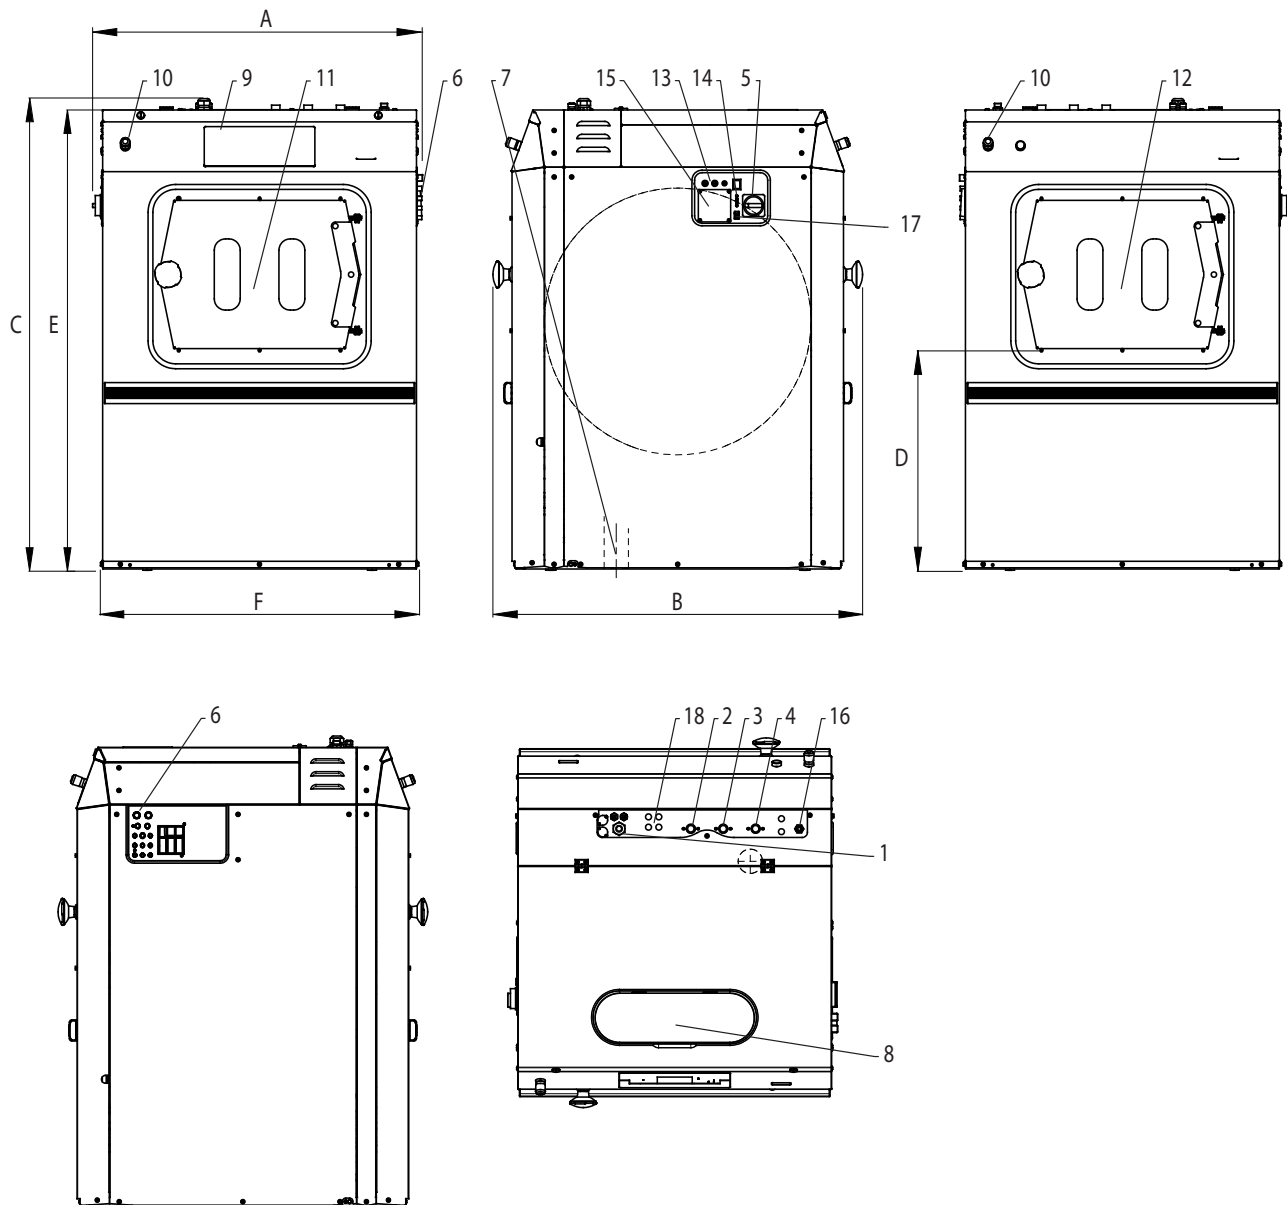

- 1 Electrical connection
- 2 Hot water
- 3 Cold water hard
- 4 Cold water soft
- 5 Main switch
- 6 Liquid soap connection
- 7 Drain

- 8 Soap dispenser
- 9 Control panel
- 10 Button CENTRALSTOP
- 11 Loading door
- 12 Unloading door
- 13 Fuses
- 14 USB port

- 15 Electrical connection to liquid soap pumps
- 16 Steam supply
- 17 Tracetech connection (RS485)
- 18 External lubrication system